

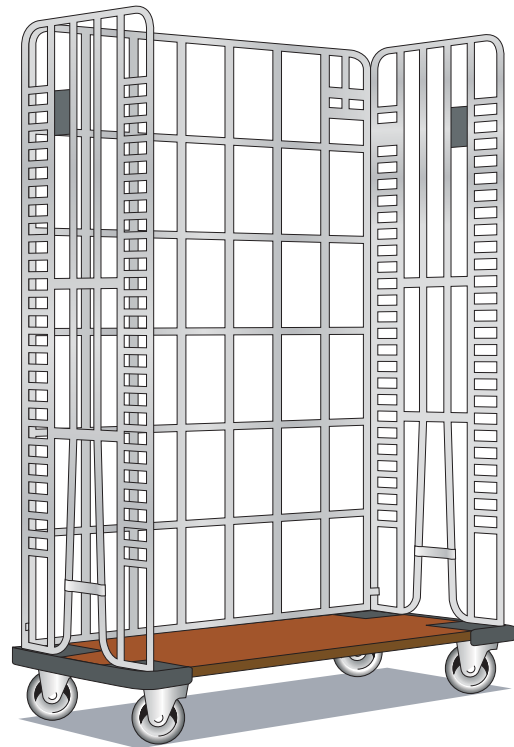


omni-roller RETURN INSTRUCTIONS

Five complete Omni-Rollers must be stacked on two trolleys. A standard Omni-Roller comprises one undercarriage, two side sections and a rear section. Use two standard Omni-Rollers.

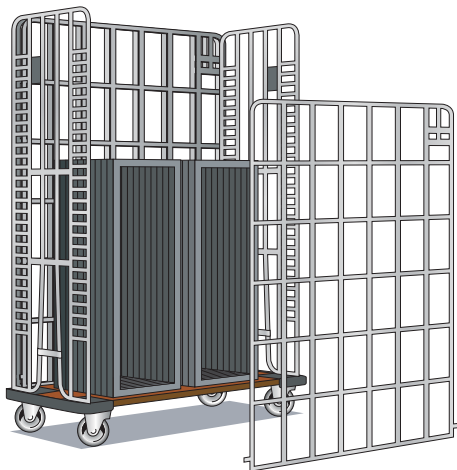

Place three loose undercarriages and six side sections on trolley 1. Place one rear section at the front.

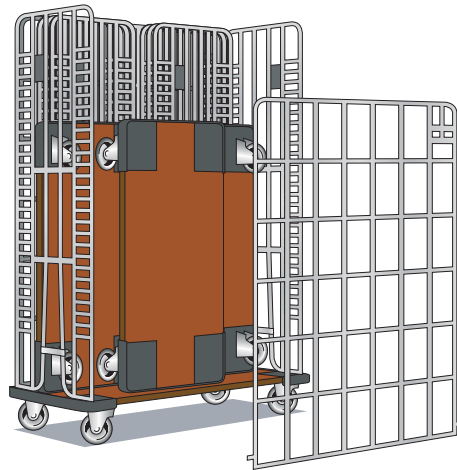

Place one rear section and twenty support frames on trolley 2. The bars or shelves can be added separately. Place one rear section at the front.